MIGUTEC

 Flexible high quality elastomeric insert Hard wearing, temperature resistant (-30°C to +120°C), replaceable
Multi directional movement Quick and easy installation
Solid, but light aluminium brackets for quick installation in screed or tiled floorings
MultiHole mounting bracket for secure fixing

| Expansion joint cover | Joint width | Total movement | Visible width | Joint width total | Joint height | Load bearing capacity | Load bearing capacity* |
|-----------------------|----------------------------------|---------------------|------------------------|----------------------|------------------|--------------------------|---------------------------|
| | | | | | | ~~ | ~~ |
| | ^bf max [mm] | Δb f [mm] | b _s [mm] | bt [mm] | h [mm] | [kN] | [kN] |
| FL 21/20 | 20 | 5(+3/-2) | 21 | 80 | 20 | 30 | 30 |
| FL 21/35 | 20 | 5(+3/-2) | 21 | 107 | 35 | 30 | 30 |
| FL 21/50 | 20 | 5(+3/-2) | 21 | 107 | 50 | 30 | 30 |


No continuous use

All information on load bearing capacity does only apply to non-floating floors.

For installation in asphalt, please ask for our technical advice.

Production length: 4 m

Standard colors: black, grey

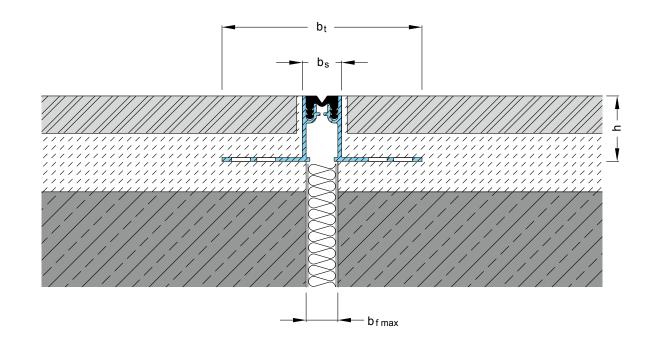

YOU FIRST. MIGUA®